

035 Skate-Spike Matting™

Specialty Matting

www.usabuildingsupplies.com

Available Colors: Black




Specialty



Skate-Spike Matting™ is a durable vinyl linear ribbed top surface that minimizes damage to floors from spikes or skates. Intended for use in skating rinks, locker rooms, and gymnasiums.

| Test | Test Description | *Results |
|--|---|------------|
| Compression Deflection | Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches) | N/A |
| Coefficient of Friction ASTM C1028-96 | A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip. | .68 |
| Abrasion Resistance ASTM D3884-01 | Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams) | 0.37 Grams |
| Elongation ASTM D412 | Test specimen is stretched at a specified rate until breaking point. The results are measured in weight needed to break, and % of size increase at breaking point. | 150% |
| Hardness ASTM D2240-02 | The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indenter forced into the material under specified conditions | 88 |

*All testing of NoTrax® floor matting has been performed by an independent testing laboratory.

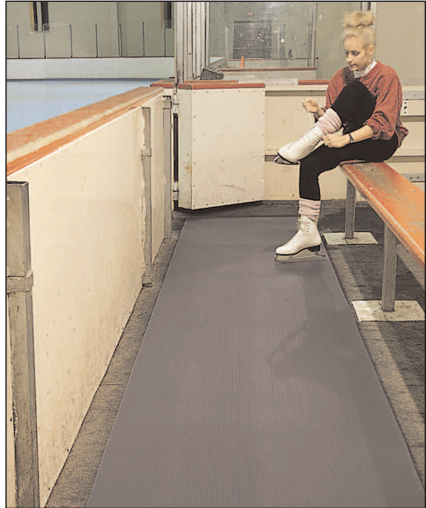

Custom Lengths

- Available in 3' x 75' roll
- Thickness: 1/4"
- Weight: 1.5 lbs/per sq. ft.