


**STAINLESS STEEL FREE STANDING WASTE RECEPTACLE**

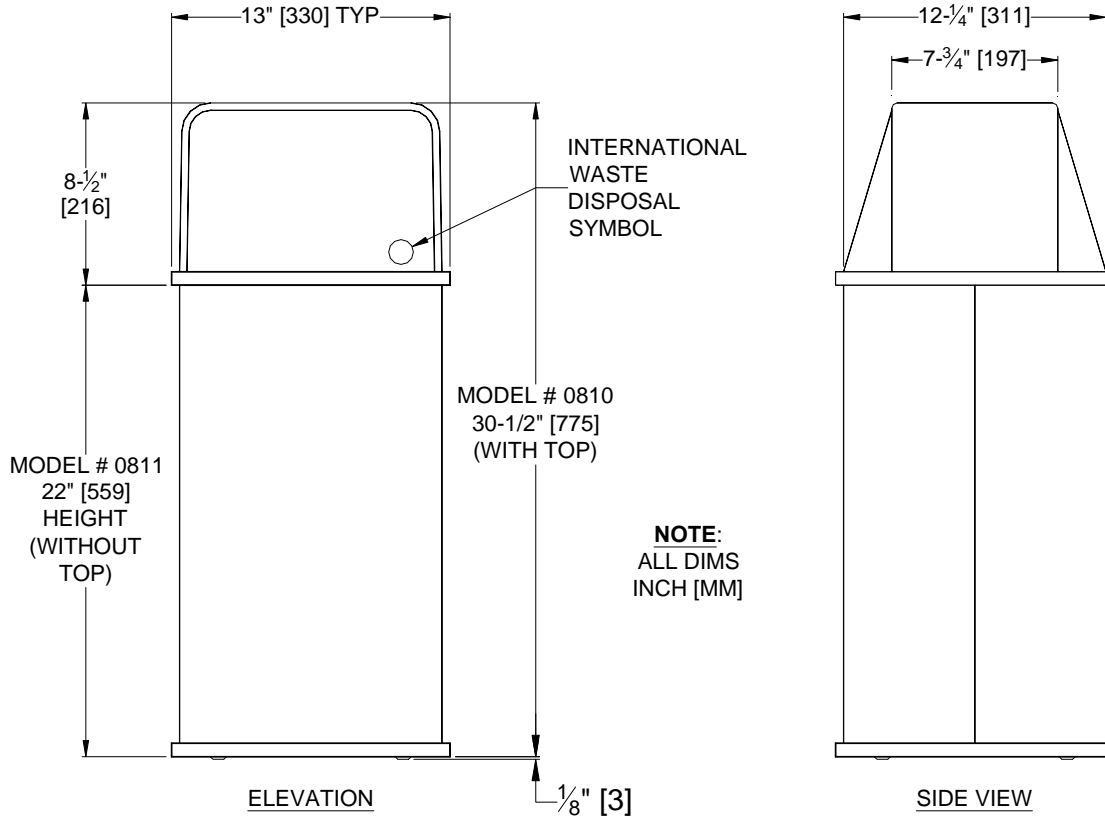

**SPECIFICATION**

Stainless Steel Free Standing Waste Receptacle shall hold more than 14 gals [54 liters] of waste material. Unit shall be 22 gauge 304 alloy 18-8 with satin finish and be protected during shipment with PVC film easily removable after installation. Receptacle shall have no exposed fastening devices or spot welded seams. Receptacle shall have two continuous vinyl wall protectors, top and bottom, around entire perimeter. Top shall be removable for easy maintenance and have two swing doors hung on heavy duty spring loaded stainless steel multi-staked piano hinges to return doors to closed position. Bottom of receptacle shall be equipped with four (4) non-removable rubber supports. Each door shall have the international waste symbol affixed to it. Receptacle shall be supplied with or without top as per schedule and model specified.

**INSTALLATION**

Waste receptacle is free standing and should be placed in appropriate position on finished floor.

**OPERATION**

Waste material is deposited into the receptacle through opening or through the push in doors if top is provided. Use of a disposable trash liner bag recommended. The disposal bag is emptied of waste material on a cycle determined by maintenance needs.

**SCHEDULE**

MODEL №	HEIGHT	CAPACITY	CONFIGURATION
0810	30-1/2" [775]	14.3 gals [54 liters]	WITH TOP
0811	22" [559]	14.3 gals [54 liters]	WITHOUT TOP