


118 - ARROW TRAX®

PRODUCT INFORMATION BROCHURE



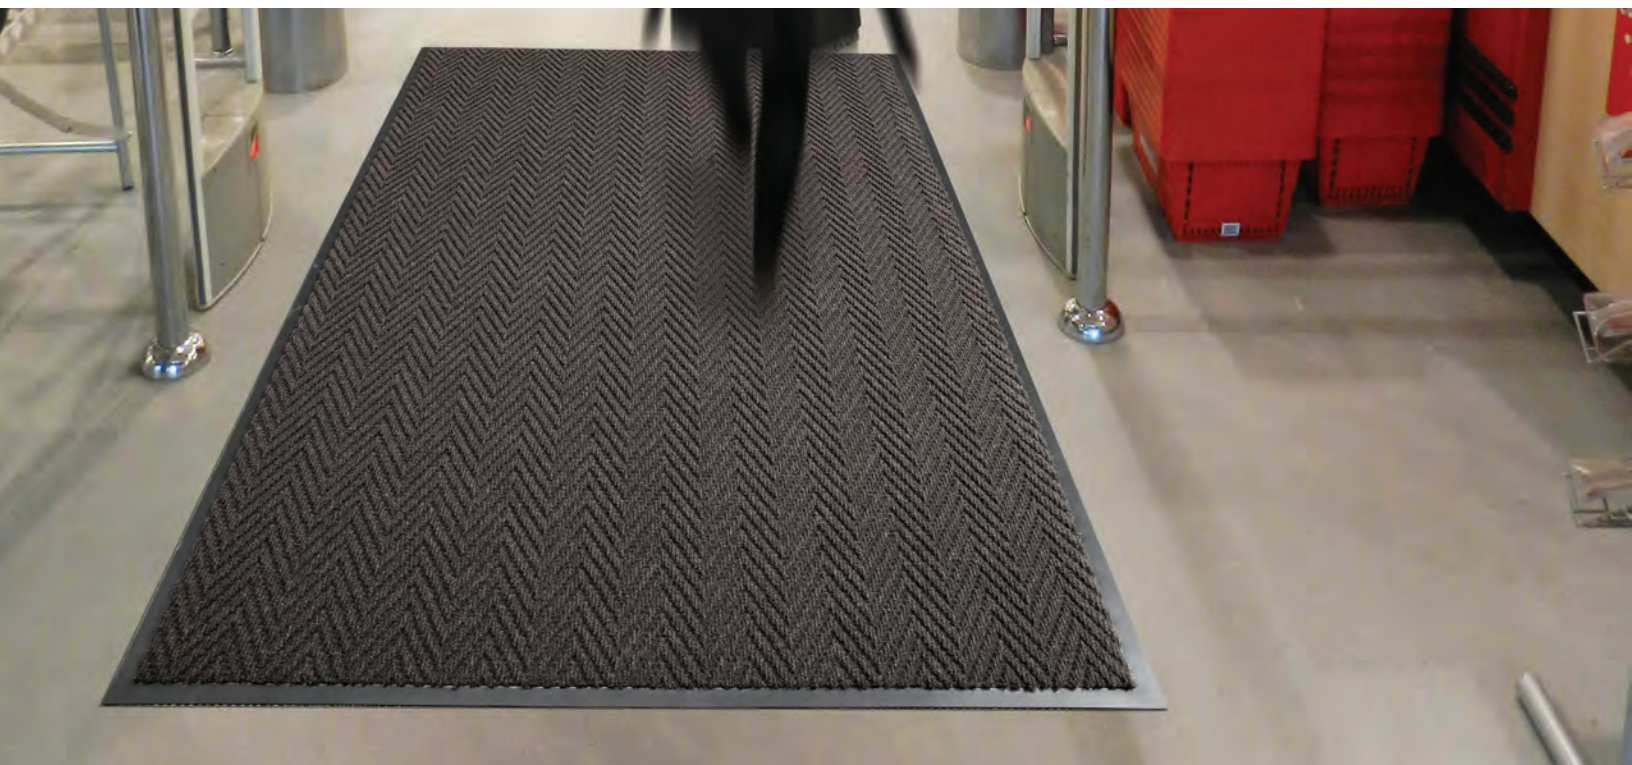

For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**




118 - ARROW TRAX® mats provide exceptional performance in highly visible areas that require a subtly attractive yet functional matting product. The durable herringbone pattern offers non-directional scraping action and moisture retention, and a full 40 ounces of needle-punched yarn per square yard provides the highest degree of crush resistance in heavy traffic areas. Heavy-weight vinyl non-slip backing ensures minimum movement.

Material: Polypropylene Carpet W/Vinyl Backing

Features and Benefits:

- Scraper mat
- High/low herringbone carpet scrapes and channels moisture and debris away from shoes
- 40 ounces of needle-punched yarn per square yard
- Low profile to perform in narrow clearance doorways
- Vinyl backing ensures minimal buckling and mat movement
- Recommended and approved product as a part of the **GreenTRAX™** program for "Green Cleaning" environments

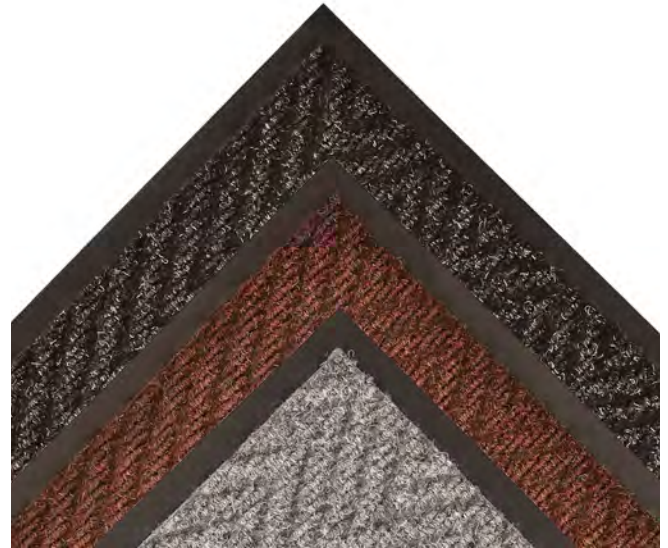



MODEL: 118

SPECIFICATIONS

APPLICATIONS

- Schools
- Hospital Entrances
- Lobbies
- Entranceways

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'		
Roll Sizes	3'x60', 4'x60', 6'x60'		
Thickness	3/8"		
Cut Lengths	3', 4', and 6' widths (up to 60' long)		
Colors	 Charcoal	 Brown	 Grey

Performance:

	Good	Better	Best	Superior
Wear Retention	<div><div></div></div>			
Crush Resistance	<div><div></div></div>			
Soil Resistance	<div><div></div></div>			
Function & Appearance	<div><div></div></div>			



TESTING DATA

Test	Test Description	Results
ASTM 5252-98a	Accelerated Wear - 4,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 2.3 Color: 3.0
ASTM D3936-05	Delamination	Exceeds backing strength
ASTM D6540-05	Accelerated Soiling	Based on Visual Inspection 5.0 - Vacuum Rating 5.0- Rating After Extraction
ASTM D412	Breaking Load/Elongation	227.2 lbs/in2
ASTM D1894-08 (modified)	Static & Kinetic Coefficient of Friction	1.20
ASTM D2859 (CPSC FF 1-70)	Flammability	Pass

*Testing performed by an independent test laboratory.

