

150 - AQUA TRAP®


PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

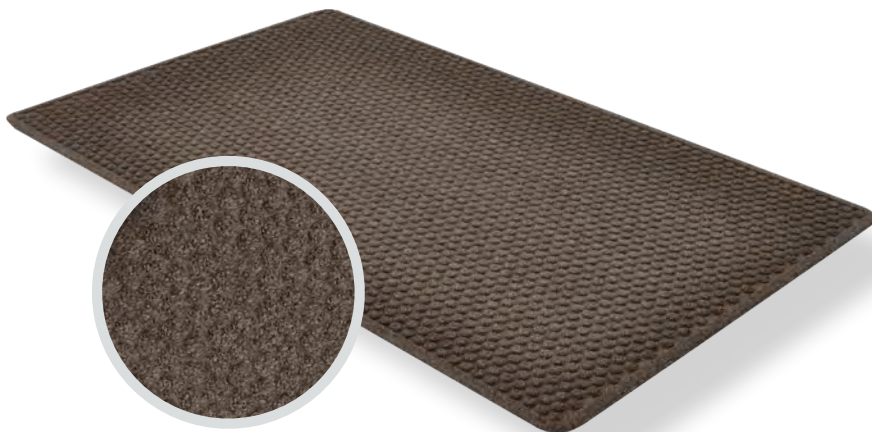


150 - AQUA TRAP® is a unique yet highly functional indoor entrance mat with a molded bubble pattern that facilitates the scraping and drying process while a patented raised "Aqua Dam™" border forms a perimeter on all four sides of the mat retains moisture and debris. Aqua-Trap® features an antimicrobial carpet treatment that stops bacteria and germs at the entrance. An extremely durable rubber backed mat, Aqua-Trap® has a highly fashionable look that features carpet-to-the-edge (CTE™) to blend with its surroundings and contemporary color choices to match any décor.

Material: Polypropylene Carpet w/ Rubber Backing

Features and Benefits:

- Molded pattern facilitates scraping and drying
- Raised rubber border retains moisture and debris
- Carpet-to-edge (CTE) construction to blend with its surroundings
- Anti-Microbial carpet treatment stops bacteria and germs
- 20 ounces of tufted yarn per square yard
- Rubber underside cleat design resists mat slippage
- Recommended product as a part of the **GreenTRAX™** program for "Green Cleaning" environments

WARNING: This product can expose you to 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov

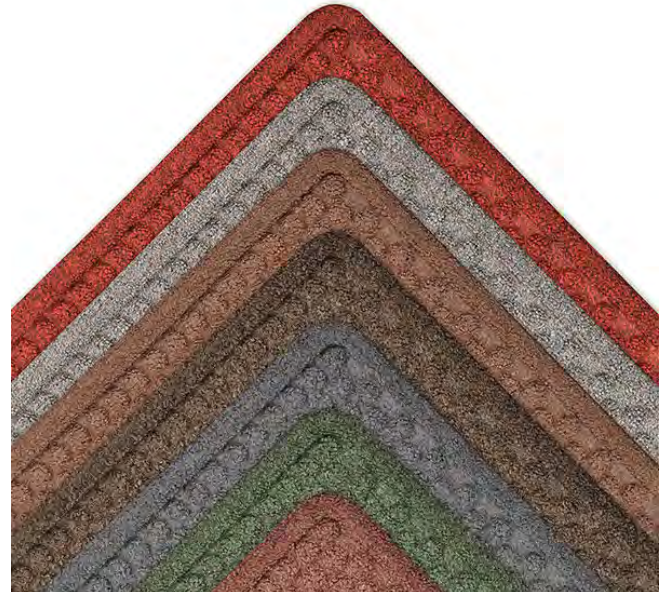


MODEL: 150

SPECIFICATIONS

APPLICATIONS

- Hospitals
- Schools
- Daycare
- Health Care Facilities

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x10', 4'x6', 4'x10'		
Thickness	3/8"		
Cut Lengths	3' and 4' widths (5'3" up to 60' long)		
Colors			
	Charcoal	Brown	Grey
			
	Burgundy	Red/Black	Hunter Green
			
	Slate Blue		

Performance:

	Good	Better	Best	Superior
Wear Retention				
Crush Resistance				
Soil Resistance				
Function & Appearance				



Outdoor Use



Heavy Traffic



Cut Lengths

TESTING DATA

Test	Test Description	Results
ASTM D3884-01	Abrasion Resistance	0.46 grams (0.9%)
ASTM D-5252-98	Accelerated Wear - 12,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 2.7 Color: 3.5
ASTM D6540-00	Accelerated Soiling	Based on Visual Inspection 2.5 - Vacuum Rating 4.0 - Rating After Extraction
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass
-	Water Retention	Weight Gain = 28.7% (0.356 gals./yd2)
AATCC Test Method 147	Antibacterial Activity	No Growth After 24 Hrs
ASTM G22	Bacterial Resistance	No Growth After 21 Days
ASTM G21	Fungal Resistance	No Growth After 28 Days

*Testing performed by an independent test laboratory.

