


193 - SUPERIOR IMPACT™ LOGO MAT

PRODUCT INFORMATION BROCHURE



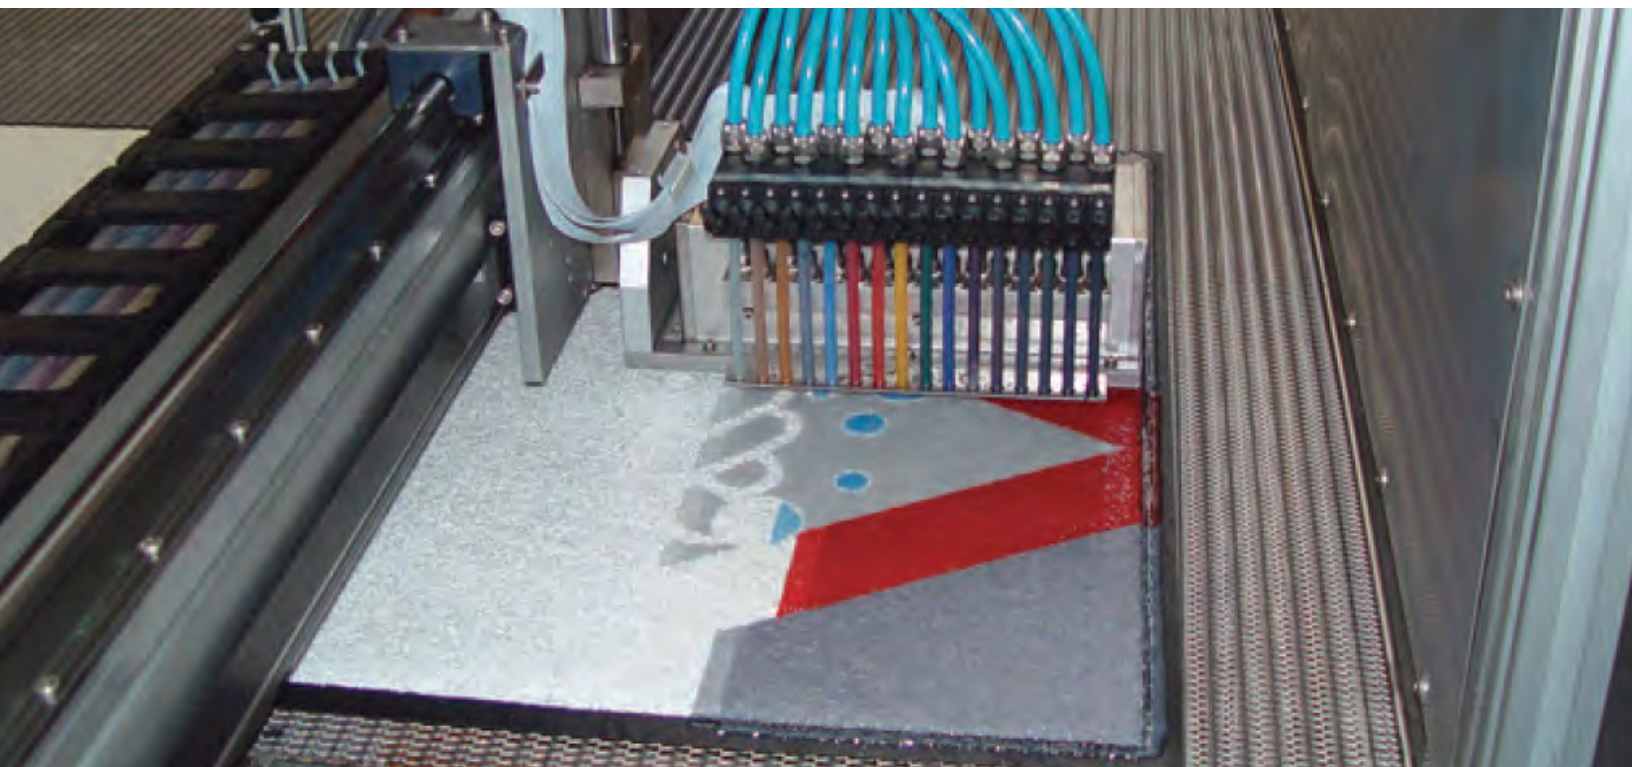

For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**



193 - SUPERIOR IMPACT™ LOGO MATS is a multi-functional entrance mat that stops dirt and debris while adding aesthetic appeal and promotes your brand/message. The mats are printed with a state-of-the-art dye-injection process that is entirely computer controlled. Dye is injected deep into the carpet pile for long-lasting vibrant color that resists fading over time. The mat itself is made from a high quality fiber with a heavy-duty vinyl backing that creates greater surface friction, greatly reducing mat movement on smooth floors such as wood, marble, tile, or concrete.

Material: Nylon Carpet W/Vinyl Backing

Features and Benefits:

- Dye-injection process for long lasting, vibrant color
- Color palette of 22 base colors
- 24 ounces of cut-pile nylon yarn per square yard provides increased moisture retention
- Vinyl backing ensure minimal buckling and mat movement





MODEL: 193



SPECIFICATIONS

APPLICATIONS

- Retail
- Restaurants
- Hotels
- Corporate Offices

Stock Sizes	2'x3', 3'x4', 3'x5', 4'x6', 4'x8', 5'x8', 3'x10', 4'x10', 4'x12'					
Thickness	3/8"					
Colors						
	Silver	Yellow	Blue	Tan	Grey	Gold
						
	Dark Grey	Orange	Dark Green	Blue Grey	Green	Rust
						
	Light Blue	Red	Black	Olive Green	Wine	Purple
						
	Dark Blue	Brown	Teal	Beige		

Performance:

	Good	Better	Best	Superior
Water Retention				
Crush Resistance				
Soil Resistance				
Function & Appearance				



Custom



Medium Traffic

TESTING DATA

Test	Test Description	Results
ASTM D1894-08	Static and Kinetic Coefficients of Friction	Painted Concrete: Avg. Load 32.3 lbs; COF 0.65 Epoxy Concrete: Avg. Load 31.5 lbs; COF 0.63 VCT: Avg. Load 35.9 lbs; COF 0.72 Vinyl Sheet: Avg. Load 27.7 lbs; COF 0.55
ASTM D-5252-98	Accelerated Wear - 4,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 3.2 Color: 3.0
ASTM D6540-00	Accelerated Soiling	Based on Visual Inspection 1.0 - Vacuum Rating 3.0 - Rating After Extraction
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass
ASTM D412-06	Breaking Load and Elongation	225.6 lbs/Inch ²
ASTM D3936-05	Delamination	Construction would not allow for delamination
ASTM D2240-02	Durometer (Hardness)	75
ASTM D1335-05	Tuft Bind	9.0 lbs.

*Testing performed by an independent test laboratory.

