


WALL ANCHOR

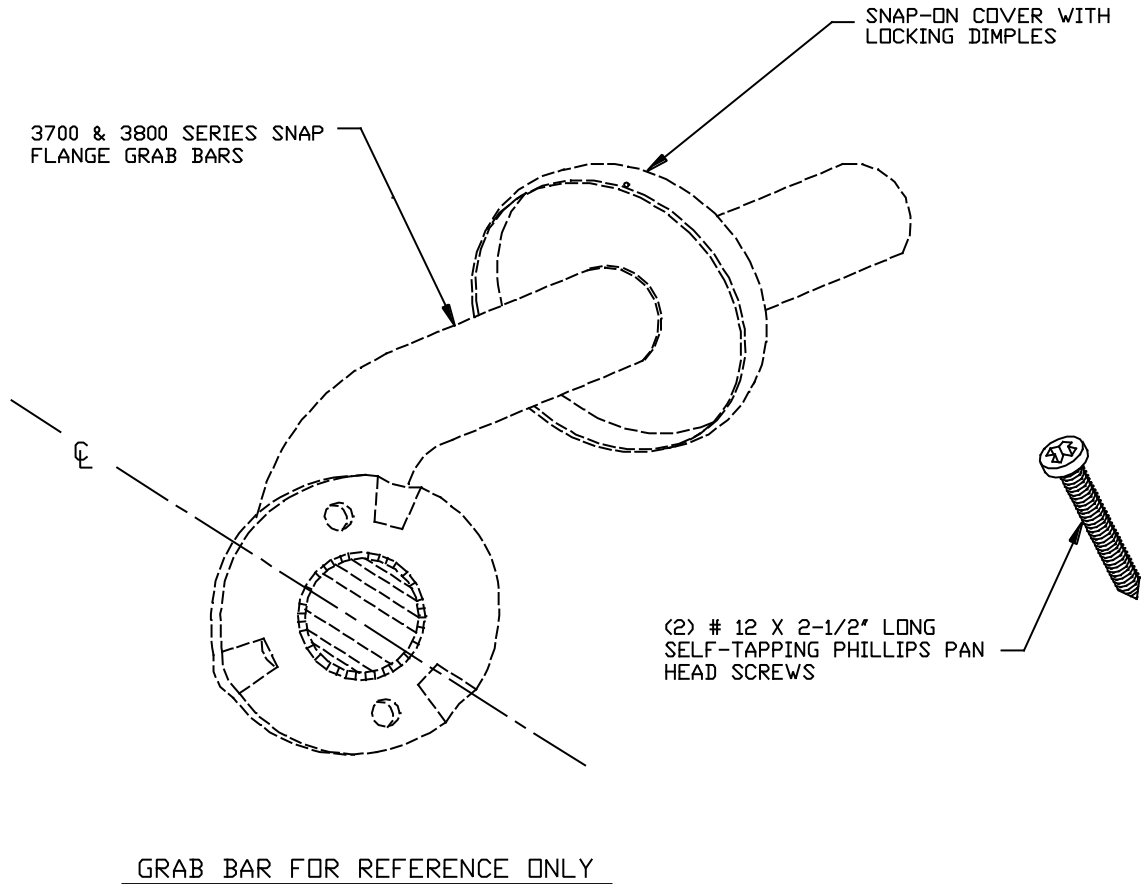

**SPECIFICATION**

Wall Anchor shall be suitable for use in dry wall partitions to secure grab bars with snap type mounting flanges (e.g. ASI series 3700, and 3800). Wall anchor shall be #12 x 2-1/2" long self-tapping Phillips pan head screw. Anchor kit shall contain (2) self-tapping Phillips pan head screws. Specify one (1) kit per flange.

**INSTALLATION**

For compliance with ADA Accessibility Guidelines mount grab bar so that horizontal centerline is 33" (838mm) minimum to 36" (914mm) maximum above finished floor. Locate grab bar in exact mounting position on wall and transfer centerlines of holes from each support post flange onto dry-wall that is suitably reinforced and code compliant. Drill holes into drywall and reinforcement or blocking at these centerline locations to suit screws furnished. Insert screws through flanges of grab bar and tighten onto wall. Snap cover of grab bar over mounting plate.