

# 474 - ERGO MAT™


PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

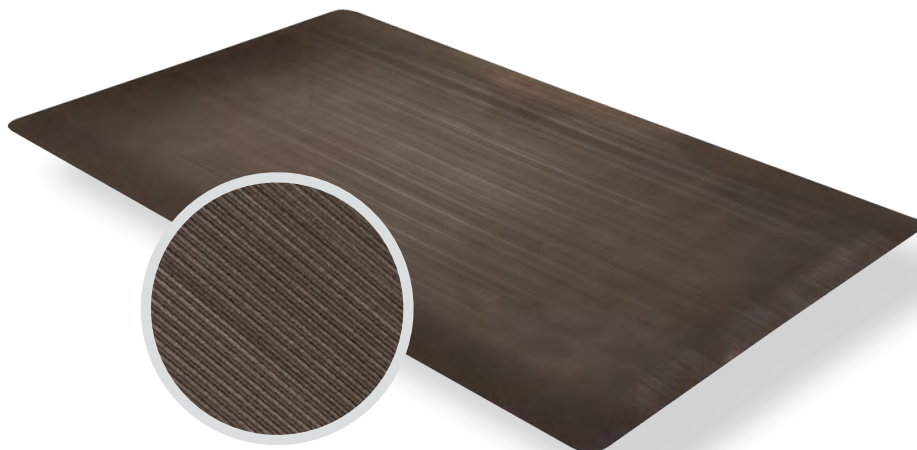

**474 - ERGO MAT™** is an anti-fatigue floor mat provides comfort and ergonomic support. The durable vinyl corrugated ribbed top surface that provides directional traction to reduce slips and offers superior anti-fatigue support for applications where workers are required to stand for long periods of time. The top surface is combined with a dense closed cell foam base utilizing Notrax® exclusive UniFusion™ technology virtually eliminating the possibility of de-lamination. All Notrax® laminate floor mats come standard with RedStop™, a uniquely engineered non-slip backing technology that eliminates the slipping and sliding of floor mats on smooth surface flooring such as tile, wood, marble, and treated concrete


**Material:** Vinyl Surface With Dense Closed PVC Foam Base

### Features and Benefits:

- Heavy-duty corrugated ribbed top surface combined with a dense closed cell PVC foam base provides added cushioning comfort
- Corrugated ribbed texture provides traction and easy to sweep clean
- Ribbed texture runs the length of the mat
- UniFusion™ bond guaranteed for the life of the mat
- Redstop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)



**WARNING:** This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

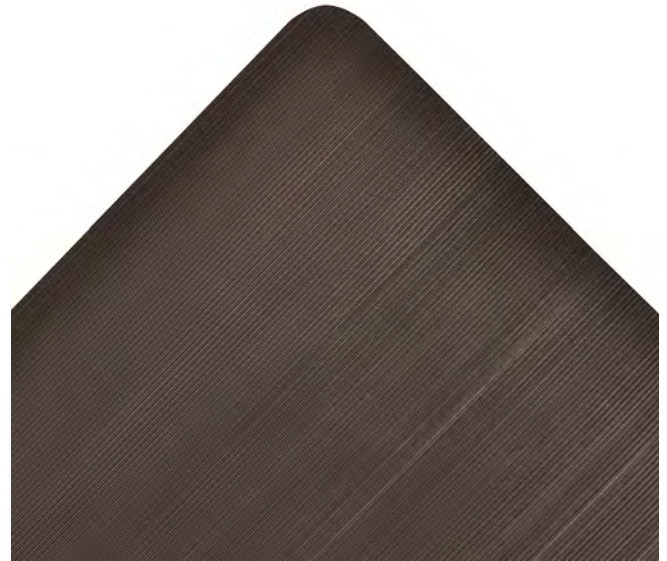

MODEL: 474

## SPECIFICATIONS


Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	1/2"
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	

### Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

### APPLICATIONS

- Packaging Stations
- Shipping Areas
- Inspection Areas
- Retail

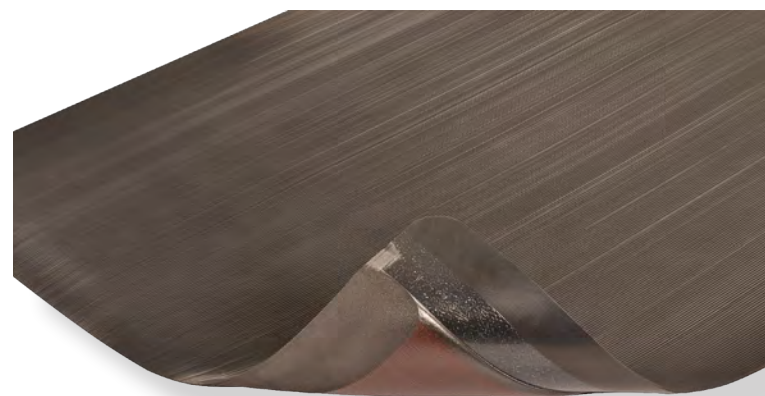

Anti-Fatigue



Anti-Slip



Cut Lengths



Insulation

# TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.183" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.75
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	6.05 Grams

\*Testing performed by an independent test laboratory.

