

490 - DURA TRAX®


PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

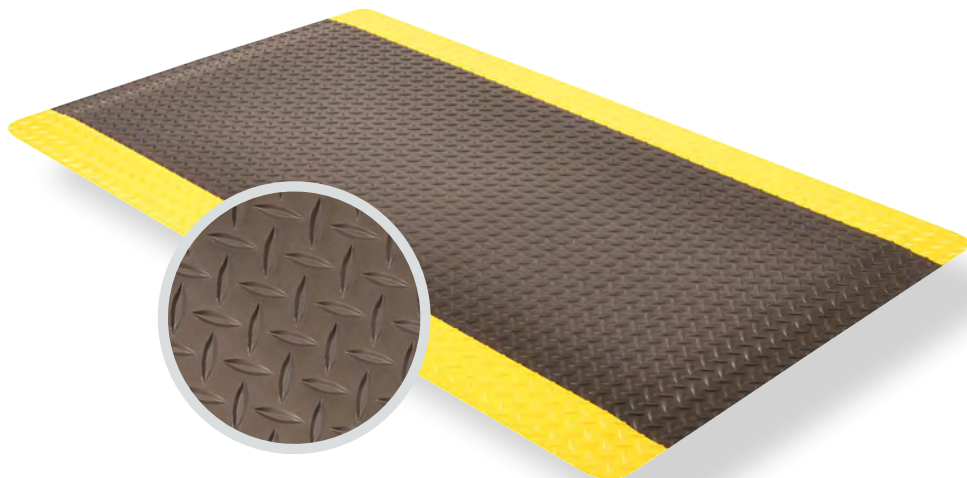

490 - DURA TRAX® is a high performance anti-fatigue floor mat representing the ultimate in comfort and durability for today's industrial environments. A nitrile rubber top surface provides a noticeably softer and more comfortable work surface and a diamond-plate design offers greater slip resistance and is easy to sweep or mop clean. Dura Trax® combines the heavy-duty nitrile rubber top surface with a dense sponge backing utilizing Notrax® exclusive UniFusion™ technology. This virtually eliminates the possibility of de-lamination. All Notrax® laminate floor mats come standard with RedStop™, a uniquely engineered non-slip backing technology that eliminates the slipping and sliding of floor mats on smooth surface flooring such as vinyl composite tile, painted or epoxy coated concrete, vinyl sheet flooring, carpet, and ceramic tile.

Material: Nitrile Rubber Surface With Dense Closed Cell PVC Foam Base


Features and Benefits

- Nitrile rubber diamond plate top surface is combined with a dense closed cell PVC foam base
- Made from 100% recycled materials
- Diamond-plate surface texture provides added traction
- Withstands exposure to sparks (Hot metal nut tested at 600 degrees)
- UniFusion™ bond guaranteed for the life of the mat
- Redstop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)



WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov

SPECIFICATIONS

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	9/16"
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black  Black/Yellow

Performance: Good Better Best Superior

Wear Resistance		
Anti-fatigue Performance		
Slip Resistance		



MODEL: 490

APPLICATIONS

- Dry Work Areas
- Workstations
- Assembly Lines
- Welding Areas



Anti-Fatigue



Anti-Slip



Custom



Insulation



Welding

TESTING DATA

Test	Test Description	Results
ASTM C-1028-96	Static Coefficient of Friction	Dry: 0.80
-	Compression Deflection	@ 20 lbs/in ² : 0.239 @ 40 lbs/in ² : 0.349
ASTM D-1004-94a-03	Tear Strength	40.4 lbs
ASTM D-2240	Durometer (Shore A)	61
ASTM D-3884	Abrasion Resistance	@ 500 cycles: 0.5% @ 1000 cycles: 0.9%
ASTM D-2859/CPSC FF-170	Surface Flammability/Carpets and Rugs	Pass
Critical Radiant Flux ASTM E648-94A	The test result is an average critical radiant flux (watts/square cm) which indicates the level of radiant heat energy required to sustain flame propagation in the flooring system.	Watt s per Cm ² : 0.80
ASTM D-1894-01	Modified Slip Test: Avg. C.O.F. (Coefficient of Friction)	VCT: 1.600 Painted Concrete: 2.000 Vinyl Flooring: 1.600 Epoxy Painted Concrete: 2.000
ASTM D-903-98	Delamination	3.5 lbs/in

*Testing performed by an independent test laboratory.

