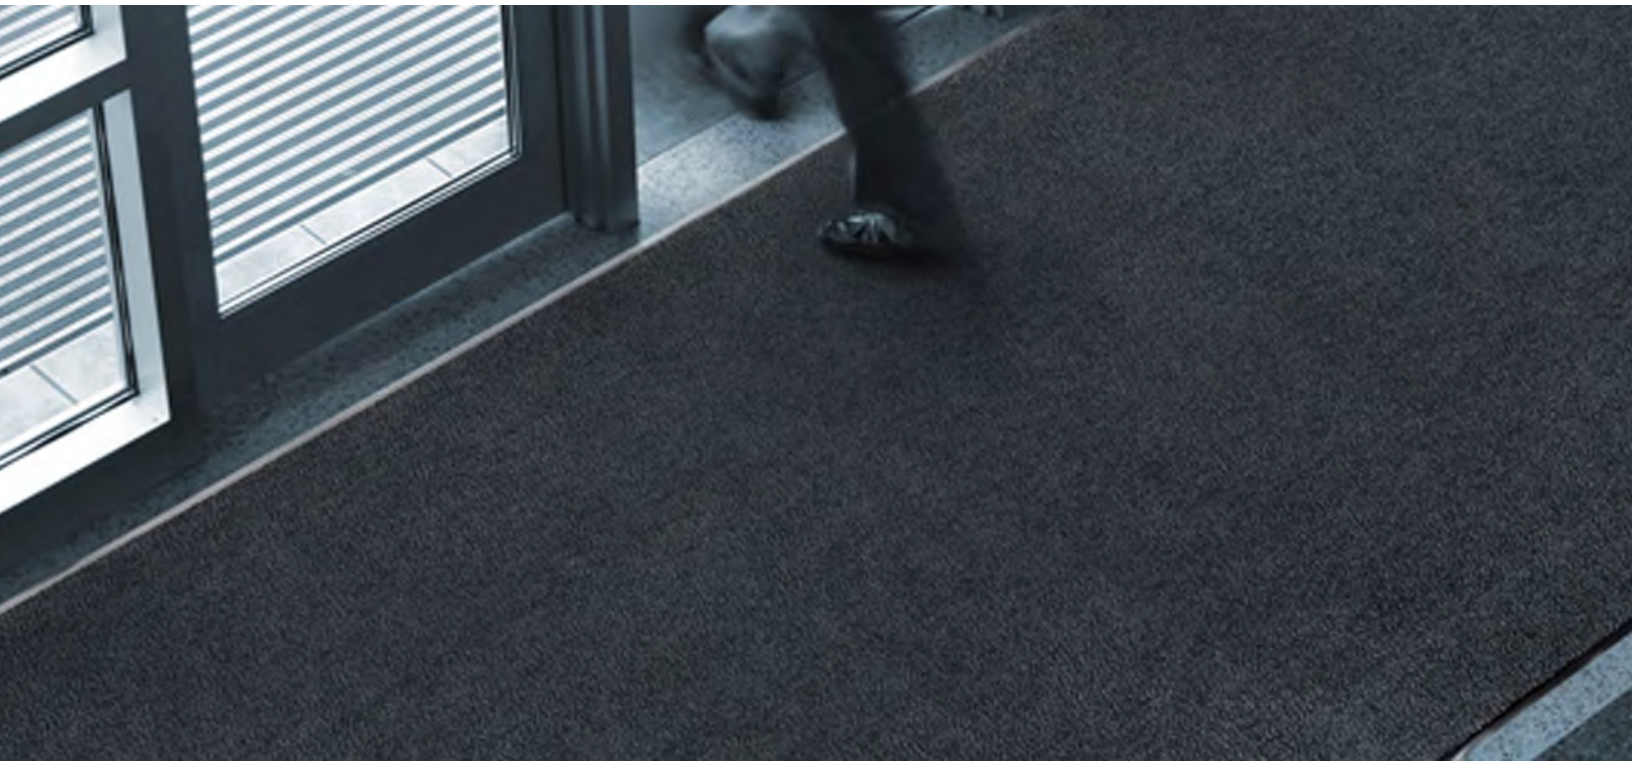


# 130 - SABRE™

PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**



**130 - SABRE™** A step above the commodity entrance mat, Sabre™ is designed for use in light to medium foot traffic areas. Sabre's™ durable Decalon® fibers provide moisture and dirt retention at entrances, lobbies, and passageways; reducing slip hazards and floor care maintenance. A vinyl non-slip backing helps to minimize mat movement.

**Material:** Polypropylene Carpet W/Vinyl Backing

**Features and Benefits:**

- Drying mat
- Decalon® fibers provide moisture and dirt retention
- 19 ounces of tufted cut-pile Decalon® per square yard
- Low profile for use in narrow clearance doorways
- Vinyl backing ensures minimal buckling and mat movement



MODEL: 130
















## SPECIFICATIONS

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4x8'		
Roll Sizes	3'x60', 4'x60', 6'x60'		
Thickness	5/16"		
Cut Lengths	3', 4', and 6' widths (up to 60' long)		
Colors	 Charcoal	 Brown	 Red/Black
	 Hunter Green	 Slate Blue	 Navy
	 Burgundy		

**APPLICATIONS**

- Schools
- Hospital Entrances
- Lobbies
- Entranceways

**Performance:**

	Good	Better	Best	Superior
Wear Retention				
Crush Resistance				
Soil Resistance				
Function & Appearance				



# TESTING DATA

Test	Test Description	Results
ASTM D3884-01	Abrasion Resistance ASTM D3884-01 (Results measured in weight loss - %)	-1.17 grams (3.7%)
ASTM D6540-05	Accelerated Soiling (Based on visual inspection)	Based on Visual Inspection 4.0 - Vacuum Rating 5.0 - Rating After Extraction
ASTM D5252-98a	Accelerated Wear (Based on visual inspection @ 4,000 cycles)	Based on visual inspection @ 4,000 cycles Considerable change in appearance and color
Water Retention	(Results measured in weight gain) Gallons per sq. yd.	Weight Gain = .415 gals./yd2
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass

\*Testing performed by an independent test laboratory.

