


755 - NIRU® VERSA RUNNER™


PRODUCT INFORMATION BROCHURE



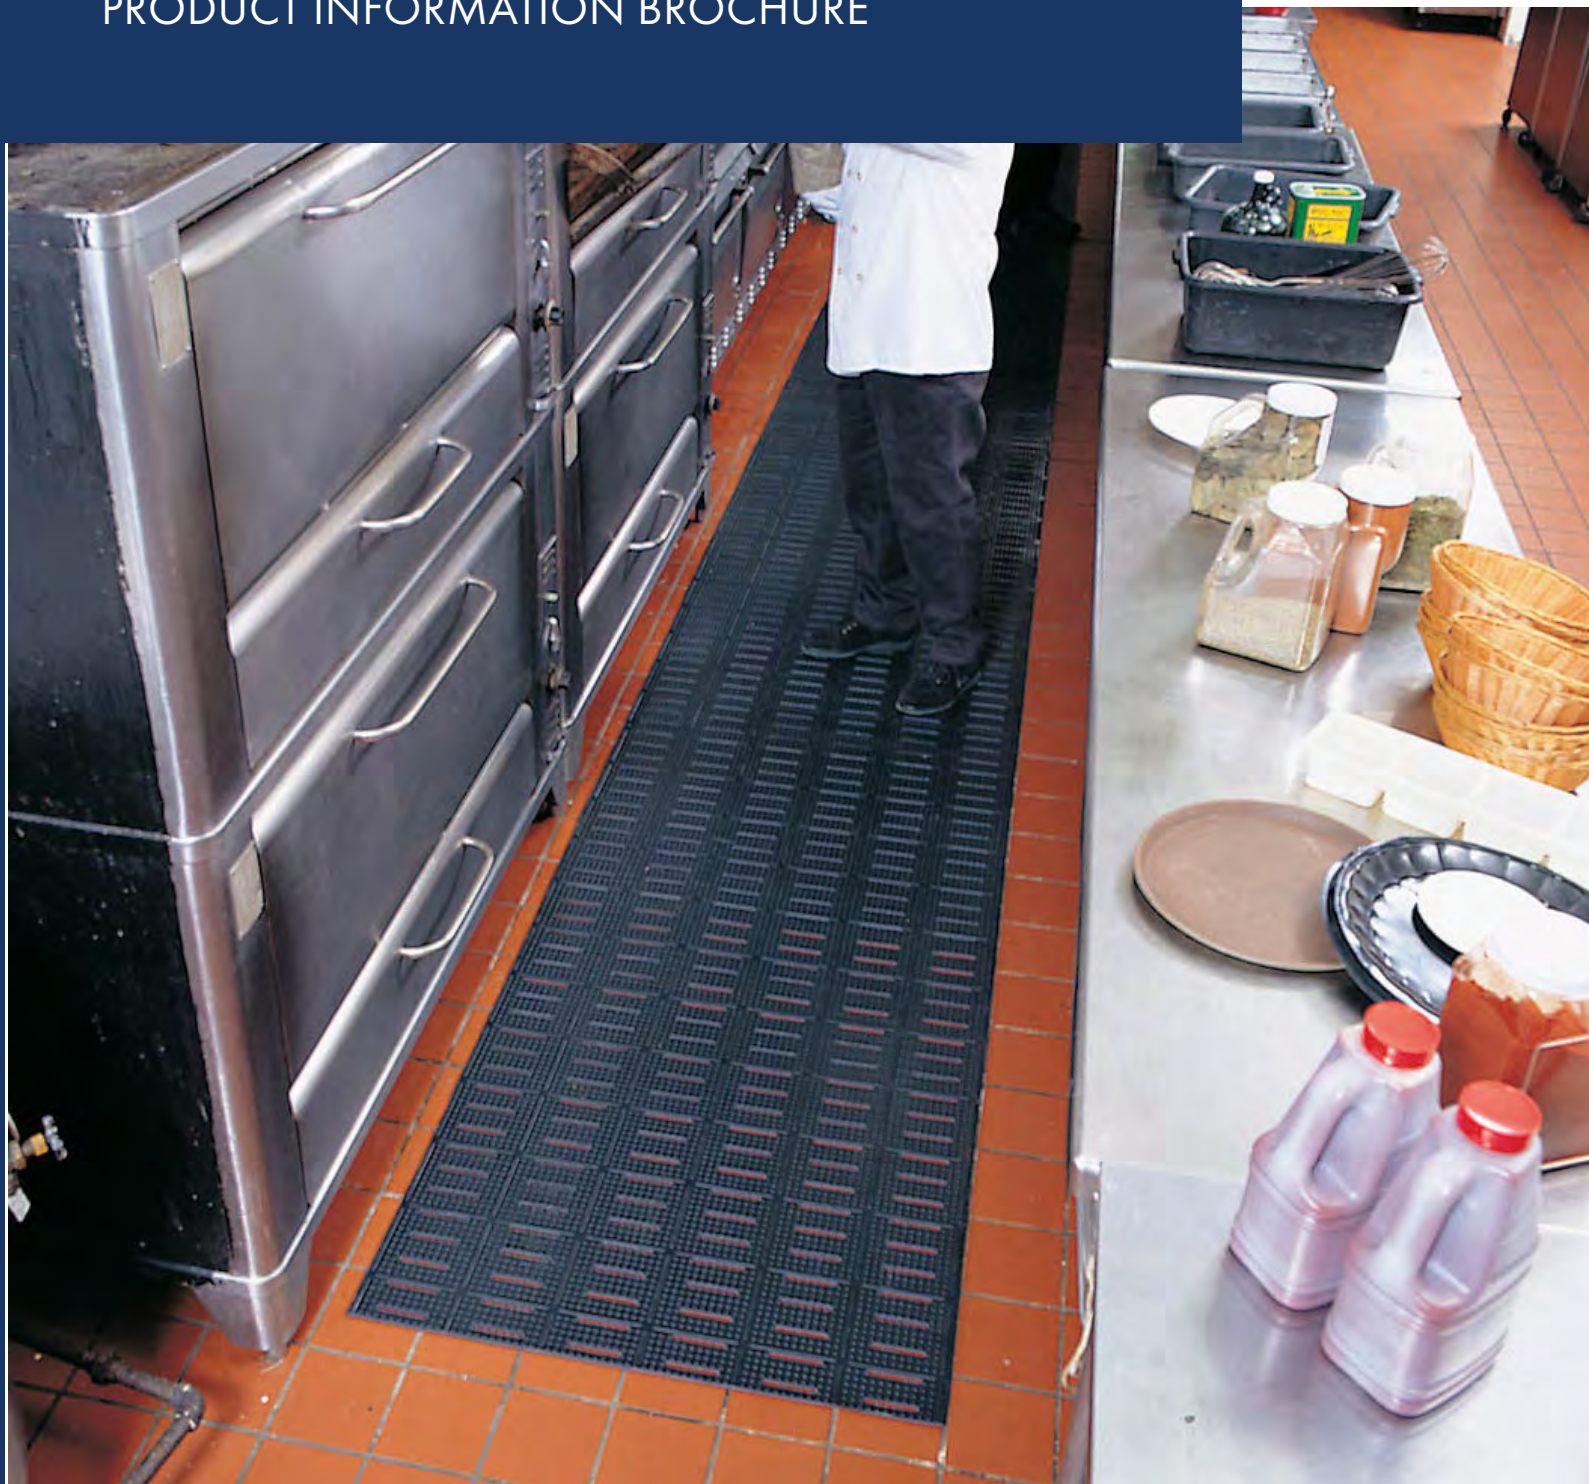

For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

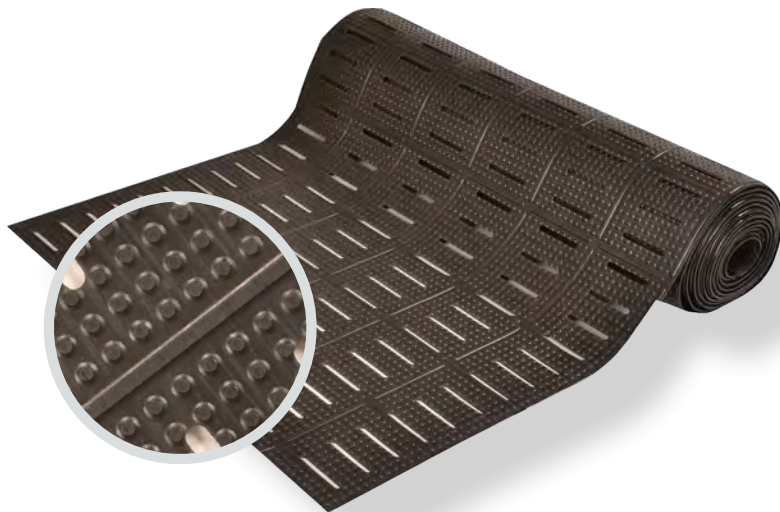

755 - NIRU® VERSA RUNNER™ is made from a 100% Nitrile rubber compound designed to withstand harsh chemicals, greases, oils, and animal fats while creating a slip resistant work surface. Slotted perforations allow for drainage and a scraper-rib design runs side-to-side on the mat for added traction. The ribbed underside enhances the anti-fatigue value of the mat and also helps to channel liquid away from the work area. Its low profile allows for use in areas with high cart traffic. Manufactured with MicroStop® anti-microbial rubber compound.


Material: Nitrile Rubber

Features and Benefits:

- 100% Nitrile rubber compound
- Slotted perforations for drainage
- Ribbed underside channels liquid away from the mat
- MicroStop® anti-microbial rubber compound




WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov

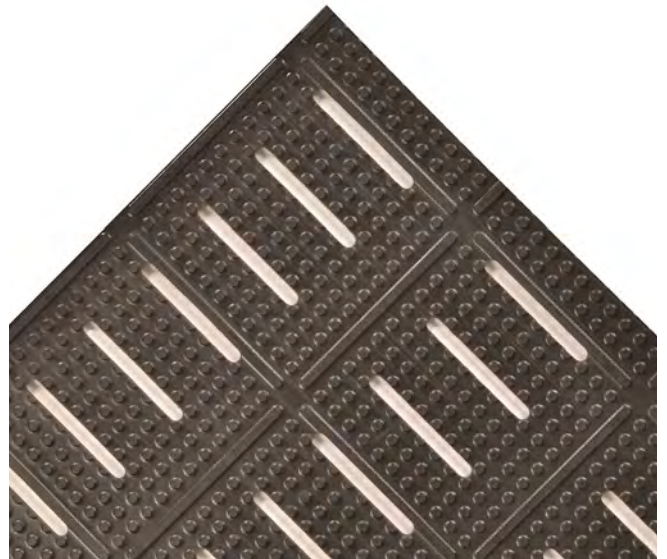













MODEL: 755

SPECIFICATIONS


Stock Sizes	2'x3', 3'x4', 3'x5'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	3/8"
Cut Lengths	2', 3' and 4' widths (up to 60' long)
Colors	 Black

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

APPLICATIONS

- Wet or dry environments that require high traction and drainage capability in a continuous mat. Low profile allows for use in applications with high cart traffic.

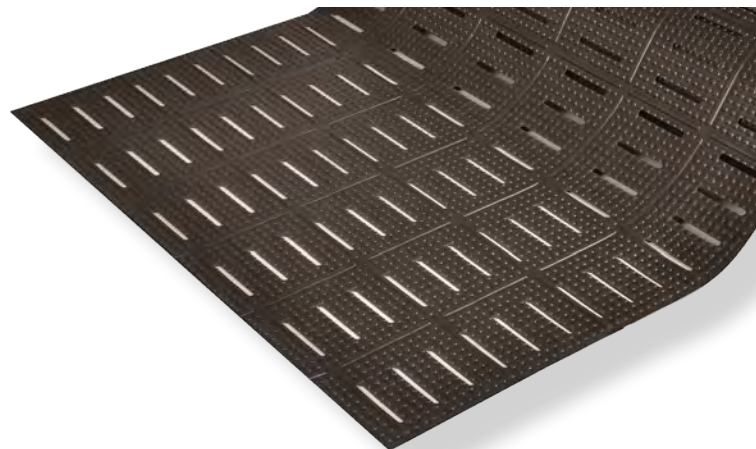

Floor Protection



Insulation



Food Processing



Food Service



Cut Lengths



Anti-Fatigue



Anti-Slip



Oil/Grease Resistant



Drainage

TESTING DATA

Test	Test Description	Results
ASTM D-624	Tear Strength	Die C - Min. 150 lbs/sq. in.
ASTM D-3884	Abrasion Resistance (Measured in weight loss)	@ 1,000 cycles - 1.21%
ASTM C-1028	Static Coefficient of Friction	Wet - 0.64 Dry - 0.79
ASTM D-2240	Durometer / Hardness	Shore A - 68
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass
ASTM D-1171	Method A Ozone	No physical or appearance change

*Testing performed by an independent test laboratory.

