

# 758 - NIRU® KNOB-TOP RUNNER™


PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

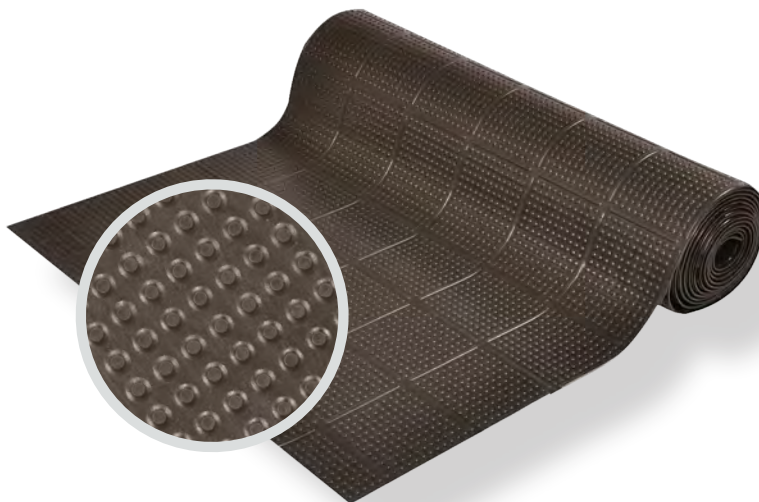

**758 - NIRU® KNOB-TOP RUNNER™** is made from a 100% Nitrile rubber compound designed to withstand harsh chemicals, greases, oils, and animal fats while creating a slip resistant work surface. Its low profile allows carts to roll over the mat with ease. Niru® Knob-Top Runner® is reversible further extending the service life of the mat making it the perfect product for industrial and food service applications where a continuous length of comfort and anti-slip matting is needed. Manufactured with MicroStop® anti-microbial rubber compound.


**Material:** Nitrile Rubber

**Features and Benefits:**

- 100% Nitrile rubber compound
- Solid top slip resistant surface
- Low profile allows for easy on/off cart traffic
- MicroStop® anti-microbial rubber compound




**WARNING:** This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is known to the State of California to cause cancer. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

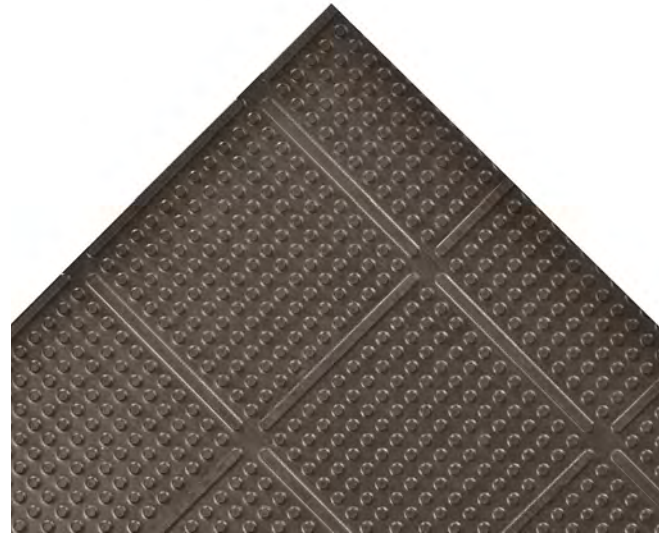


MODEL: 758

## SPECIFICATIONS


Stock Sizes	2'x3', 3'x4'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	1/4"
Cut Lengths	2', 3' and 4' widths (up to 60' long)
Colors	 Black

**Performance:**

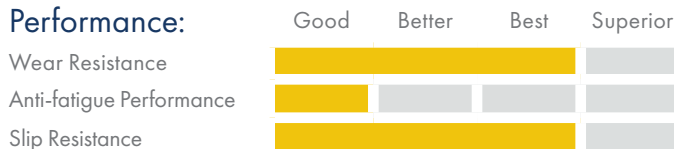

**APPLICATIONS**

- Wet or dry environments that require high traction and drainage capability in a continuous mat. Low profile allows for use in applications with high cart traffic.

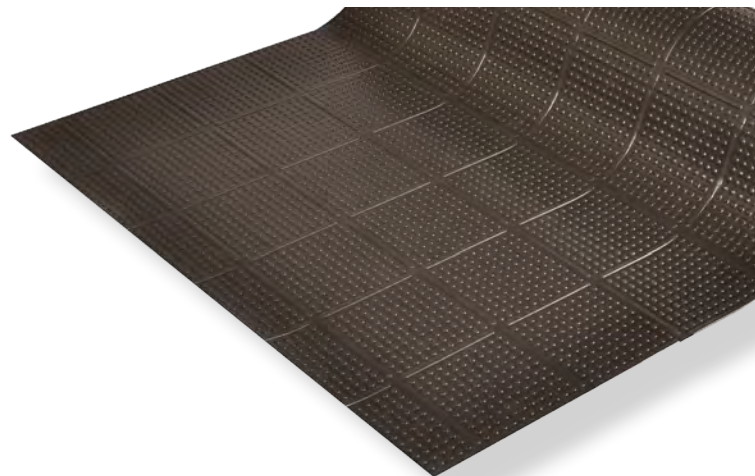

# TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.506" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.80
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	9.19 Grams
Elongation ASTM D412	Test specimen is stretched at a specified rate until breaking point. The results are measured in weight needed to break, and % of size increase at breaking point.	144.4% (average of 5 specimens)
Hardness ASTM D2240-02	The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indenter forced into the material under specified conditions	69

\*Testing performed by an independent test laboratory.

