
MODEL No:	9477-SM	
ISSUED:	1-87	
REVISED:	5-03	

PROFILE COLLECTION SURFACE MOUNTED TOILET SEAT COVER DISPENSER

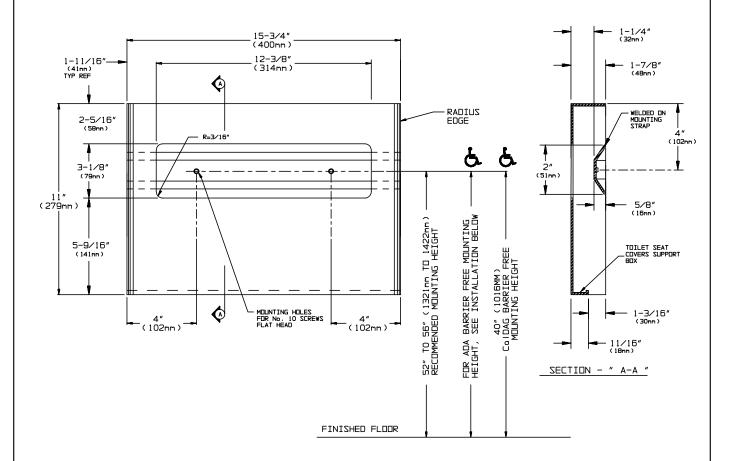

SPECIFICATION

Profile Collection Surface Mounted Toilet Seat Cover Dispenser shall hold and dispense 250 standard single or half-fold paper toilet seat covers contained in supply box. Cabinet shall be fabricated of alloy 18-8 stainless steel, type 304, 16 gauge; all exposed surfaces shall have N° 4 satin finish protected during shipment with a plastic PVC film which shall be easily removable after installation. Vertical edges shall be 3/4'' (19mm) rounded. All four corners are welded and ground smooth with no open miters. Cover dispensing slot shall have a fully deburred flat edge for snag-free dispensing and user safety. Structural assembly shall be of welded construction.

INSTALLATION

Unit is surface mounted in wall or partition using two (2) $N^{\circ}10$ self tapping screws (by others). Mounting holes are hidden behind dispenser box for vandal resistant locking but clearly accessible through dispenser slot for installation. For compliance with ADA Accessibility Guidelines, unit should be installed so that dispenser slot is 54''(1372mm) maximum above finished floor (AFF) if clear floor side reach access is provided or 48'' (1219mm) maximum AFF if clear floor forward reach access only is provided or 46'' (1168mm) maximum AFF if side reach over an obstruction is only provided (i.e. water closet)

OPERATION

Covers are self-feeding until supply is depleted. Unit is manually reloaded with a full box through access door on schedule determined by maintenance requirements.